

makes the Whaler unsinkable.

It also makes them tough. So tough the Coast Guard uses them to rescue people in ordinary boats who get in trouble in big seas and high winds. So tough Marine raid-craft platoons use Whalers to attack targets regular landing craft can't get to.





ND GROWS

That toughness starts with an advanced computer-aided design system. It turns instincts of boaters, fishermen and safety experts into three-dimensional images of an ideal boat. Then the 5-axis digital router carves those images into reality with micrometer precision.

Ergonomic studies make sure everything's in exactly the right place. Prototypes are tested, tortured, tweaked and refined. Then tested again.


When everything's perfect, the shape becomes a steel-reinforced mold. It won't warp or flex, so the hull and deck always fit together precisely.

Resin and fiberglass are applied in an exact 40/60 ratio for strength and flexibility. The hull and deck are permanently joined together as the space between them is filled with closed-cell foam that bonds them into a rigid, one-piece structure. It's absolutely unsinkable. Totally impervious.

Everything that can be done to make Whalers more durable and reliable is done.

Over the years a lot has changed, but the important things have stayed the same. The absolute dependability. The solid stability. The reassuring safety of Whaler's unsinkable hull. The total security that's been a Whaler tradition from the very beginning.

You can still get a boat just like the one that started it all back in 1958. But today you can choose from sixteen more, each one creating a new legend all its own right from its very first day on the water.

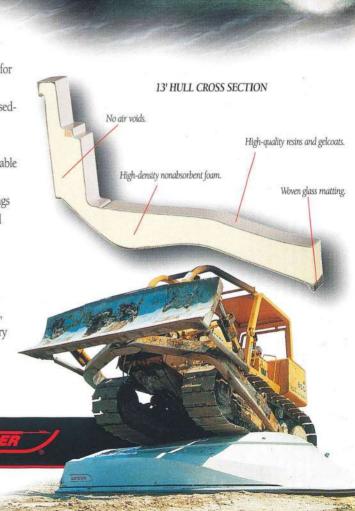



11'Tender

- Beam: 5' (1.55m)
 Draft: 6" (.15m)
 Weight: 210lbs (95kg)
 Swamped Cap: 750lbs (340kg)
 Persons Cap: 3

- Beam: 5'5" (1.65m)
 Draft: 6" (.15m)
 Weight: 360lbs (165kg)
 Swamped Cap: 1600lbs (725kg)
 Persons Cap: 6



SPECIFICATIONS

- · LOA: 16'7" (5.10m)
- Beam: 6'2" (1.90m)
- Draft: 9" (.23m)
- Weight: 850lbs (386kg)
- Swamped Cap: 2000lbs (905kg)
- Persons Cap: 7

17 Standard



SPECIFICATIONS

- LOA: 16'7" (5.10m)
- Beam: 6'2" (1.90m)
- Draft: 9" (.23m)
- Weight: 950lbs (430kg)
- Swamped Cap: 2000lbs (905kg)
- Persons Cap: 7

17 Montauk



SPECIFICATIONS

- LOA: 14'3" (4.34m)
- Beam: 6'3" (1.91m)
- Draft: 9" (.23m)
- Weight: 1000lbs (453kg)
- Swamped Cap: 2900lbs (1315kg)
- Persons Cap: 5

14Dauntless



SPECIFICATIONS

- LOA: 30'8" (9.35m)
- Beam: 10'4" (3.15m)
- Draft: 20" (.51m)
- Weight: 5600lbs (2540kg)
- Swamped Cap: 5800lbs (2630kg)
- Persons Cap: 14


28'Outrage



SPECIFICATIONS

- LOA: 20'7" (6.27m)
- Beam: 8'4" (2.50m)
- Draft: 15" (.38m)
- Weight: 2400lbs (1080kg)
- Swamped Cap: 5200lbs (2359kg)
- Persons Cap: 10

21 Conquest

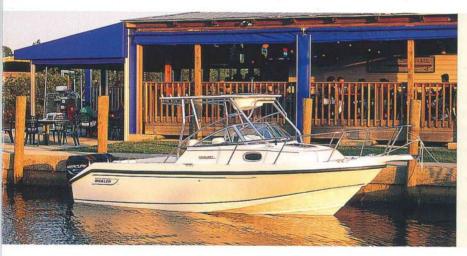

SPECIFICATIONS

- LOA: 22'7" (6.88m)
- Beam: 8'6" (2.59m)
- Draft: 15" (.38m)
- Weight: 2900lbs (1315kg)
- Swamped Cap: 4500lbs (2025kg)
- Persons Cap: 9

23'Conquest



SPECIFICATIONS

- LOA: 30'8" (9.35m)
- Beam: 10'4" (3.15m)
- Draft: 20" (.51m)
 - Weight: 5600lbs (2540kg)
- Swamped Cap: 5800lbs (2630kg)
- Persons Cap: 14

28'Conquest



SPECIFICATIONS

- LOA: 16'3" (4.95m)
- Beam: 7'1" (2.16m)
- Draft: 11" (.28m)
- Weight: 1300lbs (589kg)
- Swamped Cap: 4200lbs (1905kg)
- Persons Cap: 6

16 Dauntless



SPECIFICATIONS

- LOA: 18'2" (5.54m)
- Beam: 8' (2.44m)
- Draft: 11" (.28m)
- Weight: 1800lbs (810kg)
- Swamped Cap: 4000lbs (1800kg)
- Persons Cap: 7


18'Dauntless



SPECIFICATIONS

- LOA: 18'2" (5.54m)
- Beam: 8' (2.44m)
- Draft: 11" (.28m)
- Weight: 1800lbs (810kg)
- Swamped Cap: 4000lbs (1800kg)
- Persons Cap: 7

18'Ventura

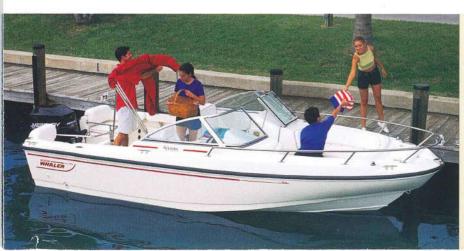

SPECIFICATIONS

- LOA: 19'8" (6.0m)
- Beam: 8'4" (2.50m)
 Draft: 15" (.38m)
- Weight: 2350lbs (1058kg)
- Swamped Cap: 4800lbs (2160kg)
- Persons Cap: 9

20'Ventura



SPECIFICATIONS

- LOA: 17'6" (5.34m) Beam: 7' (2.14m)
- Draft: 12" (.30m)
- Weight: 1700lbs (765kg)
- Swamped Cap: 2600lbs (1170kg)
- Persons Cap: 7

17'Outrage



SPECIFICATIONS

- LOA: 20'7" (6.27m) Beam: 8'6" (2.59m) Draft: 15" (.38m) Weight: 2300lbs (1043kg)
- Swamped Cap: 5200lbs (2359kg)
- Persons Cap: 10

21Outrage



SPECIFICATIONS

- LOA: 22'7" (6.88m)
- Beam: 8'6" (2.59m) Draft: 15" (.38m)
- Weight: 2900lbs (1315kg)
- Swamped Cap: 4500lbs (2025kg)
- Persons Cap: 9

23'Outrage



SPECIFICATIONS

- LOA: 27'10" (8.48m)
- Beam: 8'6" (2.59m)
- Draft: 15" (.38m)
- Weight: 3700lbs (1665kg)Swamped Cap: 7300lbs (3285kg)
- Persons Cap: 14

26'Outrage

S P E C I F I C A T I O N S

4,7,0	LOA(1)	BEAM	DRAFT(2)	WEIGHT	MAX WT. CAP(3)	SWAMPED(4)	PERSONS CAP	MAX HP	MIN HP(5)	SHAFT	FUEL CAP
11' Tender	11'4" 3.45m	5' 1.55m	6" .15m	210lbs 95kg	560lbs 254kg	750lbs 340kg	, 3	10hp 7.5kw		15" .38m	
13' GLS	13'4" 4.10m	5'5" 1.65m	6" .15m	360lbs 165kg	1200lbs 5 44 kg	1600lbs 725kg	6	40hp 30kw	9hp 7kw	20'' .51m	
17' Standard	16'7" 5.10m	6'2" 1.90m	9" .23m	850lbs 386kg	1415lbs 641kg	2000lbs 905kg	7	100hp 75kw	35hp 25kw	20" .51m	
17' Montauk	16'7" 5.10m	6'2" 1.90m	9" .23m	950lbs 430kg	1415lbs 641kg	2000lbs 905kg	7	100hp 75kw	35hp 25kw	20" .51m	
14' Dauntless	14'3" 4.34m	6'3" 1.91m	9" .23m	1000lbs 453kg	1100lbs 498kg	2900lbs 1315kg	5	75hp 56kw	30hp 23kw	20" .51m	25gal 95L
16' Dauntless	16'3" 4.95m	7'1" 2.16m	11" .28m	1300lbs 589kg	1700lbs 765kg	4200lbs 1905kg	6	115hp 85kw	50hp 37kw	20" .51m	45gal 170L
18' Dauntless	18'2" 5.54m	8' 2.44m	11" .28m	1800lbs 810kg	2400lbs 1080kg	4000lbs 1800kg	7	150hp 113kw	90hp 68kw	25" .63m	65gal 250L
18' Ventura	18'2" 5.54m	8' 2.44m	11" .28m	1800lbs 810kg	2400lbs 1080kg	4000lbs 1800kg	7	150hp 113kw	90hp 68kw	25" .63m	65gal 250L
20' Ventura	19'8" 6.0m	8'4" 2.50m	15" .38m	2350lbs 1058kg	2230lbs 1011kg	4800lbs 2160kg	9	225hp 169kw	130hp 98kw	25" .63m	87gal 328L
17' Outrage	17'6" 5.34m	7' 2.14m	12" .30m	1700lbs 765kg	1820lbs 825kg	2600lbs 1170kg	7	150hp 113kw	90hp 68kw	25" .63m	56gal 212L
21' Outrage	20'7" 6.27m	8'6" 2.59m	15" .38m	2300lbs 1043kg	3900lbs 1769kg	5200lbs 2359kg	10	250hp 186kw	135hp 100kw	25" .63m	125gal 473L
23' Outrage	22'7" 6.88m	8'6" 2.59m	15" .38m	2900lbs 1315kg	3750lbs 1700kg	4500lbs 2025kg	9	300hp 225kw	150hp 113kw	25"d/30"s .63m/.76m	166gal 639L
26' Outrage	27'10" 8.48m	8'6" 2.59m	15" .38m	3700lbs 1665kg	4300lbs 1950kg	7300lbs 3285kg	14	450hp 335kw	225hp 169kw	25"d/30"s .63m/.76m	200gal -757L
28' Outrage	30'8" 9.35m	10'4" 3.15m	20" .51m	5600lbs 2540kg	4300lbs 1950kg	5800lbs 2630kg	14	600hp 450kw	300hp 225kw	25"d .63m	296gal 1120L
21' Conquest	20'7" 6.27m	8'4" 2.50m	15" .38m	2400lbs 1080kg	3950lbs 1791kg	5200lbs 2359kg	10	250hp 186kw	135hp 100kw	25" .63m	92gal 354L
23' Conquest	22'7" 6.88m	8'6" 2.59m	15" .38m	2900lbs 1315kg	3750lbs 1700kg	4500lbs 2025kg	9	300hp 225kw	150hp 113kw	25"d/30"s .63m/.76m	125gal 473L
28' Conquest	30'8" 9.35m	10'4" 3.15m	20" .51m	5600lbs 2540kg	4300lbs 1950kg	5800lbs 2630kg	14	600hp 450kw	300hp 225kw	25"d .63m	296gal 1120L

[1] L.O.A. includes bow pulpit and swim platform on integral models only. [2] Draft for outboard models with engine(s) titled clear of water. May vary slightly depending on load and engine size. [3] BIA and U.S. Coast Guard Standards for persons, motor and gear. [4] Total weight (persons, motor and gear) boat wall support if filled with water. [5] Minimum horsepower to plane satisfactorily with light load. Consult dealer for engine recommendations.

The Unsinkable Legend™



For the name and phone number of the dealer nearest you, call 1-800-Whaler9.

World Headquarters: 4121 South US Highway 1, Edgewater, FL 32141. Internet Address: www.whaler.com

International: Oude Haagseweg 47, 1066 BV Amsterdam, Netherlands.

International E-mail: whalerintl@whaler.com

Specifications and standard equipment subject to change. Boston Whaler is not responsible for changes to parts or accessories manufactured by companies other than Boston Whaler.
BOSTON WHALER, WHALER, the BOSTON WHALER logo, DAUNTLESS, CONQUEST and OUTRAGE are registered trademarks. UNIBOND, ACCUTRACK, WHALEBOARD,
THE UNSINKABLE LEGEND and VENTURA are trademarks of Boston Whaler, Incorporated. Printed in U.S.A. © 1998 Boston Whaler, Inc. All rights reserved.